

16 SERIES

Spin-On Filter Head



FILTRATION PRODUCTS CORP.

(763) 428-6415

Fax: (763) 428-8659

18151 Territorial Road

Dayton, MN 55369

www.filtrationproducts.com

SPECIFICATIONS



Port Sizes	3/8" NPT and SAE-6
Working Pressure	200 PSI (13.7 BAR) Minimum
Flow Capacity	7 GPM (Return), 2 GPM (Suction)
Operating Temperature	225° F (107° C) Maximum
Shipping Weight	.24 lbs
Fluid Compatibility	Petroleum based oils, high water based fluids, water glycols and oil/water emulsions.
Post Size	3/4" - 16

16 SERIES


Spin-On Filter Head



DIMENSIONS

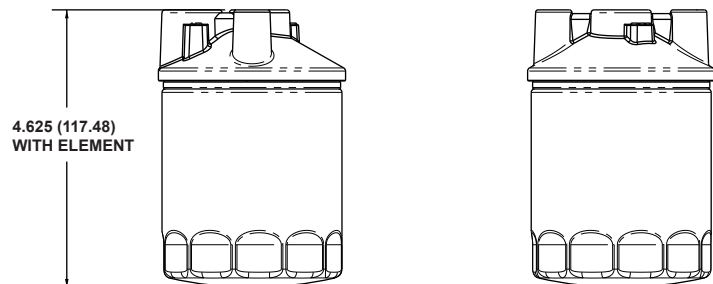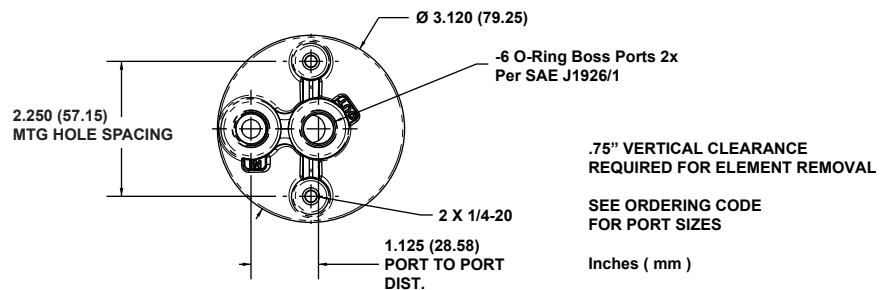


PRESSURE DROP

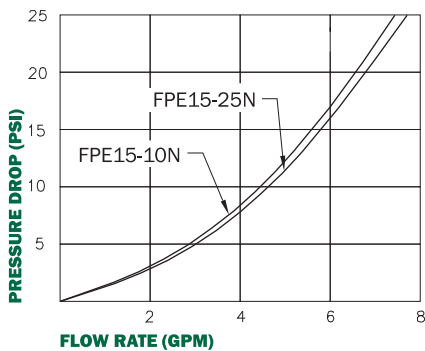

Clean element pressure drop using 150 SSU oil at 100 °F.

ORDERING CODE

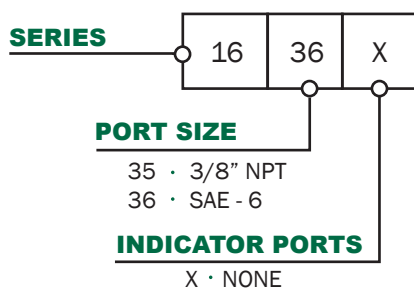

FILTER ELEMENTS

(ORDERED SEPERATELY)

PART NUMBER	MICRON RATING	BY-PASS	AVG. BETA
FPE15-10N	10	None	2
FPE15-10N-18	10	18 PSI	2
FPE15-25N	25	None	2

- Other micron and by-pass configurations are available.
- 200 PSI maximum operating pressure. (80 PSI maximum without by-pass).
- Operating temperature to 225 °F (107 °C).
- Petroleum based fluids only.

Note: Do not use these filter elements on internal combustion engines